



• **DIMENSIONS (mm)**

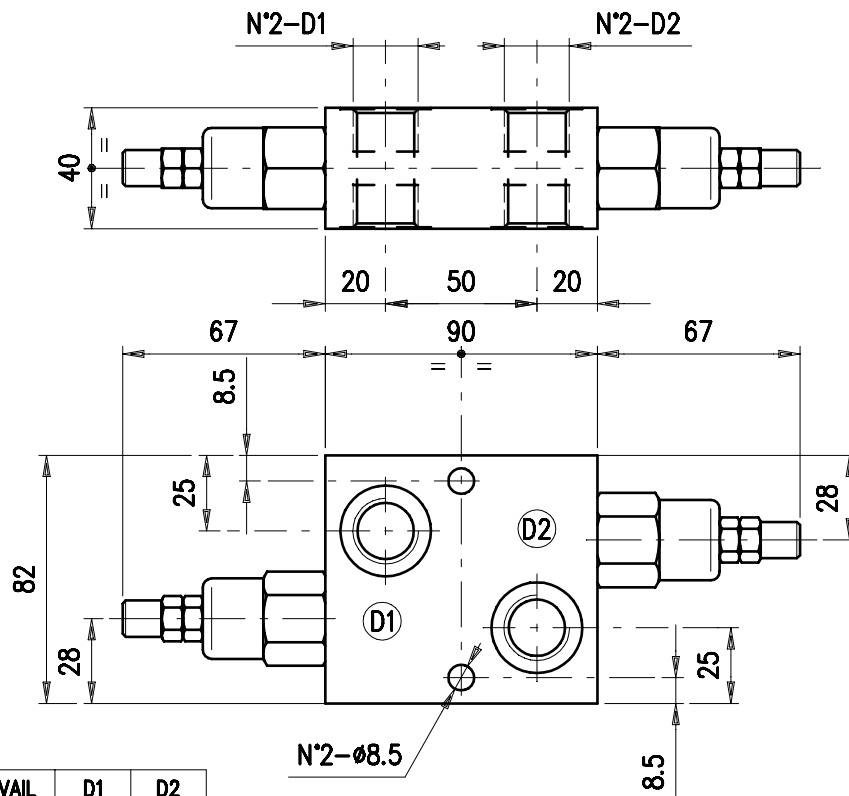


VAIL	D1	D2
10-12	G 1/2	G 1/2
10-34	G 3/4	G 3/4

- **HYDRAULIC DIAGRAM**

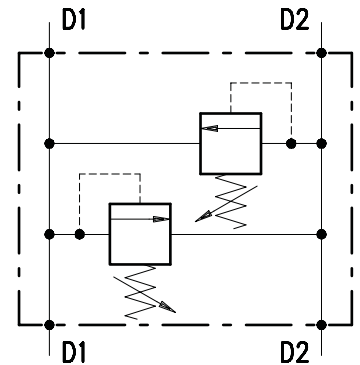

- **ASSEMBLY DIAGRAM**

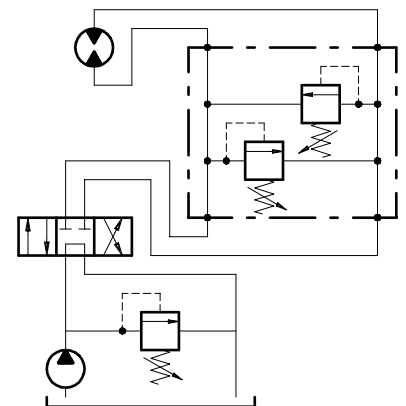

• DESCRIPTION

Dual cross-line relief valve. Direct acting, poppet type, line mounting.

- **OPERATION**

Allows pressure relief on delivery pipes to engines and cylinders.
Actuator close mount is recommended to assure a more rapid valve action.

• PERFORMANCE

Maximum flow:

- VAIL 10-12 = 50 l/min.
- VAIL 10-34 = 70 l/min.

Maximum Pressure:

- 210 bar (aluminium valve)
- 350 bar (steel valve)

Application range with standard springs:

- 5 ÷ 40 bar (test setting: 30 bar at 5 l/min.)
- 20 ÷ 80 bar (test setting: 60 bar at 5 l/min.)
- 50 ÷ 220 bar (test setting: 160 bar at 5 l/min.)
- 180 ÷ 350 bar (test setting: 280 bar at 5 l/min.)


To perform setting of the valve see the pressure drop/ flow diagram.

Hysteresis: 85% of the valve setting for 1 L. flow capacity per minute

Working temperature:

- min. -25°C max. 90°C with standard BUNA N gaskets
- min. -20°C max. 120°C with optional VITON gaskets

- CROSS SECTION**

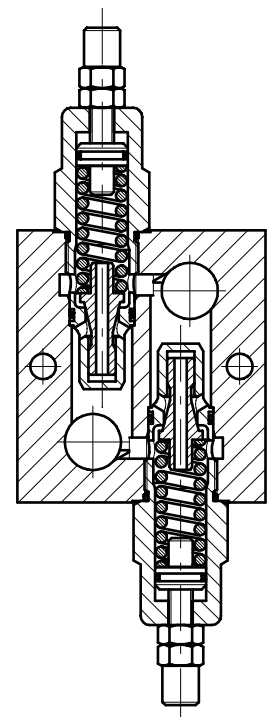

• RECOMMENDATIONS

Fluid: best use mineral oil with viscosity ranging between 10 and 200 cSt.

Filter: see page Z.9000.000.

Weight:

– aluminium valves 1.12 kg

– steel valves 2.20 kg

Cartridge used: see page 1.1000.200.



Material: internal components made out of high-grade steel duly treated and fabricated.

For more information please ask our technical office .

Variations and modifications of technical features and dimensions are reserved. **OLEOSTAR S.p.A.** also reserves the right to stop production of each and any model listed in the catalogue with no notice.

Copyrights on the text contained herein belong to **OLEOSTAR S.p.A.** . Partial and full reproductions or copies of this catalogue are forbidden.

• RATING DIAGRAMS

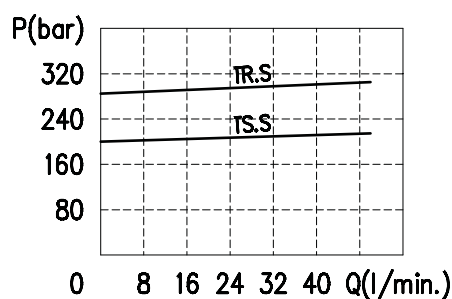
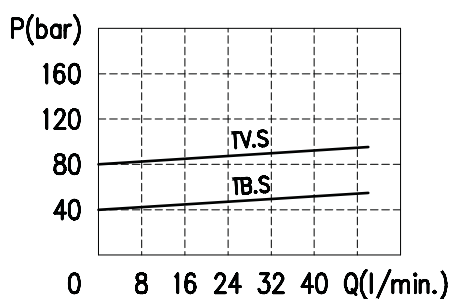


Oil viscosity 46 cSt

• ADJUSTMENTS

S

W



• CODE NUMBER

VAIL 10 - □□ / □□ . □ / □□

Port size

12) 1/2" BSP
34) 3/4" BSP

Pressure settings (bar)

TB) 5÷40
TV) 20÷80
TS) 50÷220
TR) 180÷350

Adjustment

S
W

Body material

Aluminium
ac Steel