



DIRECTIONAL CONTROL VALVES OTHER OPERATOR CETOP 3/NG6



INTRODUCTION

The ARON directional control valves NG6 are designed for subplate mounting with an interface in accordance with with UNI ISO 4401 - 03 - 02 - 0 - 94 standard (ex CETOP R 35 H 4.2-4-03), and can be used in all fields on account of their high flow rate and pressure capacities combined with compact overall dimensions.

The use of solenoids with wet armatures allows a very practical, safe construction completely dispensing with dynamic seals; the solenoid tube is screwed directly onto the valve chest whilst the coil is kept in position by means of a lock nut.

The special, precise construction of the ports and the improvement of the spools enables relatively high flow rates to be accommodated with a minimal pressure drop (Δp).

The centre position is obtained by means of calibrated length springs which reposition the spool in the centre or end of travel position once the action of the impulse is over.

The valves are designed for use with DIN 51524 standard hydraulic mineral oils and it is recommended that filters should be fitted to ensure a maximum contamination level of class 10 in accordance with NAS 1638, $\beta_{25} \geq 75$.

OTHER OPERATOR

| | |
|-----------------|---------------|
| STANDARD SPOOLS | CH. I PAGE 10 |
| AD3P... | CH. I PAGE 17 |
| AD3O... | CH. I PAGE 17 |
| AD3M... | CH. I PAGE 18 |
| AD3D... | CH. I PAGE 18 |

ORDERING CODE

- AD** Directional valve
- 3** CETOP 3/NG06
- *** Type of operator
P = Pneumatic
O = Oleodynamic
M = Mechanically
D = Direct mechanically
 (For other operator see past pages)
- **** Spool (see page I•10)
- *** Mounting type (tab.1)
- Z** No voltage
- **** Variants:
00 = no variant
V1 = Viton
H1 = Marine version (for AD3P only)
DI(*) = Internal draining (for AD3O only)
- 2** Serial No.


**TAB.1
MOUNTING**

| STANDARD | |
|----------------------------------|--|
| C | |
| D | |
| E | |
| F | |
| SPECIALS (WITH PRICE INCREASING) | |
| G | |
| H | |
| I | |
| L | |
| M | |

• In case of **mounting D** with detent a maximum supply time of 2 sec is needed (only for AC coils).

(*) The DI variant is recommended in the environments characterised by the presence of dust or any type of contamination.

PRESSURE DROPS

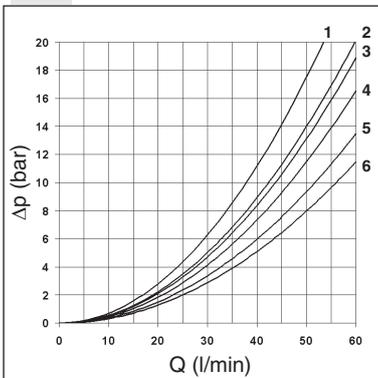

| Spool type | Connections | | | | |
|------------|-------------|-----|-----|-----|-----|
| | P→A | P→B | A→T | B→T | P→T |
| 01 | 5 | 5 | 5 | 5 | |
| 02 | 6 | 6 | 6 | 6 | 5 |
| 03 | 5 | 5 | 6 | 6 | |
| 04 | 1 | 1 | 2 | 2 | 4 |
| 05 | 5 | 5 | 5 | 5 | |
| 06 | 5 | 5 | 6 | 5 | |
| 07 | 5 | 5 | 5 | 6 | |
| 08 | 6 | 6 | | | |
| 09 | 5 | 5 | | 5 | |
| 10 | 5 | 5 | 5 | 5 | |

Curve No.

| Spool type | Connections | | | | |
|------------|-------------|-----|-----|-----|-----|
| | P→A | P→B | A→T | B→T | P→T |
| 11 | 4 | | | 6 | |
| 22 | | 4 | 6 | | |
| 12 | | 5 | | 6 | |
| 13 | | 5 | 6 | 6 | |
| 14 | 2 | 1 | 1 | 1 | 2 |
| 28 | 1 | 2 | 1 | 1 | 2 |
| 15 - 19 | 4 | 4 | 6 | 6 | |
| 16 | 5 | 5 | 4 | 4 | |
| 17 - 21 | 1 | 3 | | | |
| 18 | 5 | 5 | | | |
| 20 | 4 | 4 | 4 | 4 | |

Curve No.

The diagram at the side shows the pressure drop curves for spools during normal usage. The fluid used is a mineral oil with a viscosity of 46 mm²/s at 40°C; the tests have been carried out at a fluid temperature of 40°C. For higher flow rates than those in the diagram, the losses will be those expressed by the following formula:

$$\Delta p_1 = \Delta p \times (Q_1/Q)^2$$

where Δp will be the value for the losses for a specific flow rate Q which can be obtained from the diagram, Δp_1 will be the value of the losses for the flow rate Q1 that is used.

AD3P... PNEUMATIC OPERATION TYPE VALVES CETOP 3/NG6




1




| | |
|----------------------------|---|
| Max. pressure ports P/A/B | 320 bar |
| Max. pressure port T | 160 bar |
| Max. flow | 60 l/min |
| Minimum operating pressure | $2 + [0.027 \times (pt^*)]$ bar - see note |
| Maximum operating pressure | 20 bar |
| Fluid viscosity | $10 \div 500 \text{ mm}^2/\text{s}$ |
| Fluid temperature | $-25^\circ\text{C} \div 75^\circ\text{C}$ |
| Ambient temperature | $-25^\circ\text{C} \div 60^\circ\text{C}$ |
| Max. contamination level | class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$ |
| Weight single pilot | 1,2 Kg |
| Weight twin pilot | 1,8 Kg |

• Possible mountings:
C/D/E/F/G/H/I L/M
Ordering code see page before
(pt*)=pressure at port T

OVERALL DIMENSIONS

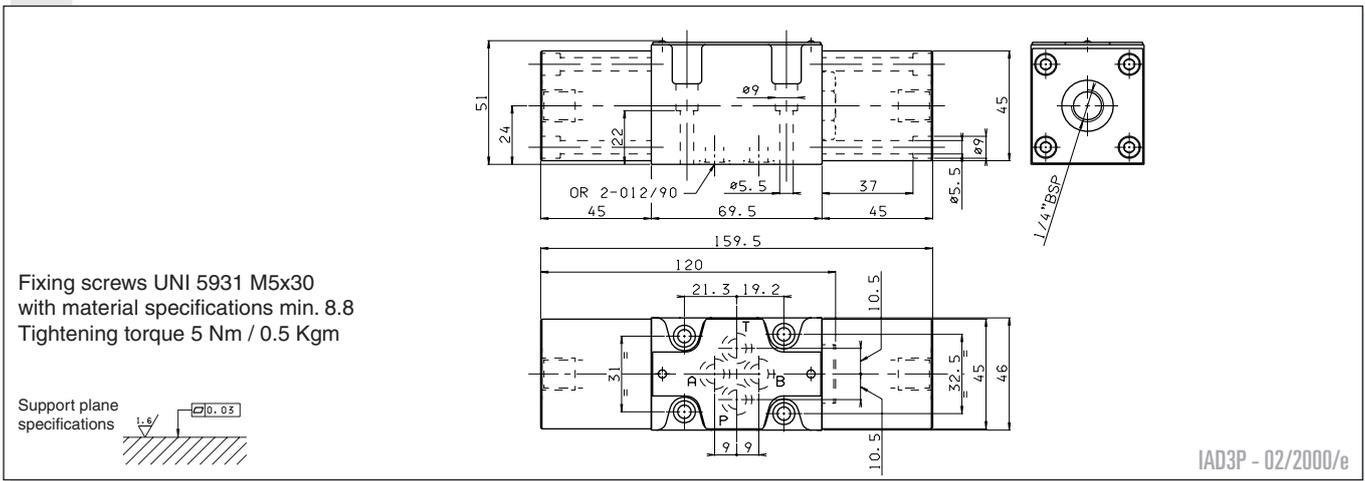

AD30... OLEODYNAMIC OPERATION TYPE VALVES CETOP 3/NG6

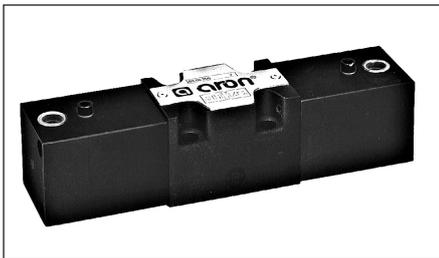

| | |
|----------------------------|---|
| Max. pressure ports P/A/B | 320 bar |
| Max. pressure port T | 160 bar |
| Max. flow | 60 l/min |
| Minimum operating pressure | $15 + [0.1 \times (pt^*)]$ bar - see note |
| Maximum operating pressure | 250 bar |
| Fluid viscosity | $10 \div 500 \text{ mm}^2/\text{s}$ |
| Fluid temperature | $0^\circ\text{C} \div 75^\circ\text{C}$ |
| Ambient temperature | $-25^\circ\text{C} \div 60^\circ\text{C}$ |
| Max. contamination level | class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$ |
| Weight single pilot | 1,5 Kg |
| Weight twin pilot | 2,3 Kg |

• Possible mountings:
C/D/E/F/G/H/I L/M
Ordering code see page before
(pt*)= pressure at port "T".


The DI variant is recommended in the environments characterised by the presence of dust or any type of contamination.

Further technical specifications (for DI variant only)

| | |
|----------------------------|--------------------------------|
| Minimum operating pressure | $[10 + (pt^*)]$ bar - see note |
| Maximum operating pressure | 250 bar |
| Max. piloting leakage | 1 l/min |

Minimum pilot pressure depends on spool scheme, flow rate and pressure.
To allow the spool to return to neutral position, the pilot pressure must be below 3 bar.

OVERALL DIMENSIONS

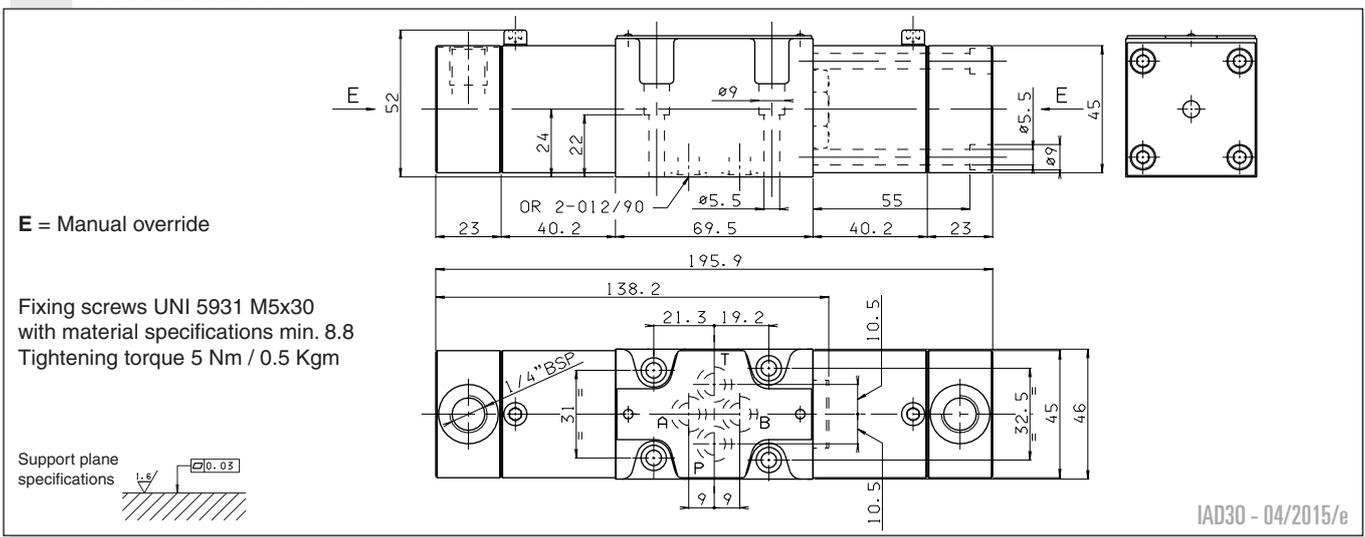

TWO SOLENOIDS, SPRING CENTRED “C” MOUNTING

| Spool type | | Covering | Transient position |
|------------|--|----------|--------------------|
| 01 | | + | |
| 02 | | - | |
| 03 | | + | |
| 04* | | - | |
| 44* | | - | |
| 05 | | + | |
| 66 | | + | |
| 06 | | + | |
| 07* | | + | |
| 08* | | + | |
| 09* | | + | |
| 10* | | + | |
| 22* | | + | |
| 11* | | + | |
| 12* | | + | |
| 13* | | + | |
| 14* | | - | |
| 28* | | - | |

ONE SOLENOID, SIDE A “E” MOUNTING

| Spool type | | Covering | Transient position |
|------------|--|----------|--------------------|
| 01 | | + | |
| 02 | | - | |
| 03 | | + | |
| 04* | | - | |
| 44* | | - | |
| 05 | | + | |
| 66 | | + | |
| 06 | | + | |
| 08* | | + | |
| 10* | | + | |
| 12* | | + | |
| 15 | | - | |
| 16 | | + | |
| 17 | | + | |
| 14* | | - | |
| 28* | | - | |

**DIRECTIONAL CONTROL VALVES
STANDARD SPOOLS CETOP 3/NG6**



NOTE

(*) Spool with price increasing

- With spools 15 / 16 / 17 only mounting E / F are possible
- 16 / 19 / 20 / 21 spool not planned for AD3E...J*
- For lever operated the spools used are different. Available spools for this kind of valve see AD3L..

ONE SOLENOID, SIDE B “F” MOUNTING

| Spool type | | Covering | Transient position |
|------------|--|----------|--------------------|
| 01 | | + | |
| 02 | | - | |
| 03 | | + | |
| 04* | | - | |
| 44* | | - | |
| 05 | | + | |
| 66 | | + | |
| 06 | | + | |
| 08* | | + | |
| 09* | | + | |
| 10* | | + | |
| 22* | | + | |
| 12* | | + | |
| 13* | | + | |
| 07* | | + | |
| 15 | | - | |
| 16 | | + | |
| 17 | | + | |
| 14* | | - | |
| 28* | | - | |

TWO SOLENOIDS “D” MOUNTING

| Spool type | | Covering | Transient position |
|------------|--|----------|--------------------|
| 19* | | - | |
| 20* | | + | |
| 21* | | + | |